



**EVOX**  
*Contributing to healthy life...*



**IN JUST THREE SECONDS  
ITS READY TO TRAVEL  
WITH YOU ANYWHERE.**





# **EVOX** **ELECTRICAL** **WHEELCHAIR**

Mobility with Style

## ATTENDANT CONTROLLER FEATURES



- Attendant controller is a dual control device designed for attendant/caregivers to help the user while walking behind the power wheelchair.



- The attendant controller designed for exclusively for the PWC use only.
- The attendant controller is attached close to hand grips.



- The attendant controller can be connected with joystick Knob of every EVOX-WC models.
- Provide the best possible care for attendant/caregivers while achieving normal driving speed.



- Very easy to handle & operate.





27/32



980



600



950



445



460



460



460



N/A



8



12



100



6-9"

CONTROLLER CAN BE FIXED ON BOTH SIDES

FLIPUP ARMREST

COMFORTABLE CUSHION

RECLINING BACKREST

FOOTREST



REMOVABLE BATTERY BOX FOR EASY RECHARGING



EASY FOLDING WITHOUT REMOVING ANY ACCESSORIES



LIGHT WEIGHT

### PARAMETERS



15-20KM DRIVING RANGE



DC 250W\* 2 PCS



24 V 20AH (LITHIUM BATTERY)



PARKING BRAKE



ALUMINIUM ALLOY



MAX SPEED 6KM/H



ELECTROMAGNETIC BRAKE



ATTENDANT CONTROLLER

# EVOX WC-108

# EVOX WC-107



	N.W. (kg)	26/27
	Overall Length(mm)	980
	Overall Width(mm)	600
	Overall Height(mm)	950
	seat width(mm)	445
	seat depth(mm)	460
	backrest height(mm)	460
	seat height(mm)	460
	folded width(mm)	N/A
	front wheel(inch)	8
	rear wheel(inch)	12
	loading capacity(kg)	100
		6-9"



**REMOVABLE BATTERY BOX FOR EASY RECHARGING**



**EASY FOLDING WITHOUT REMOVING ANY ACCESSORIES**



**LIGHT WEIGHT**

## PARAMETERS

-   
**15-20KM DRIVING RANGE**
-   
**DC 250W\* 2 PCS**
-   
**24 V 20AH (LITHIUM BATTERY)**
-   
**PARKING BRAKE**
-   
**ALUMINIUM ALLOY**
-   
**MAX SPEED 6KM/H**
-   
**ELECTROMAGNETIC BRAKE**
-   
**ATTENDANT CONTROLLER**



41/46  
42/47(E)



1140



640



935



450



435



395



500



370  
470(E)



8



12



100



6-9"

CONTROLLER CAN BE FIXED  
ON BOTH SIDES

RUBBER GRIP  
PUSH HANDLES

COMFORTABLE  
CUSHION

FLIPUP  
ARMREST

ADJUSTABLE &  
DETACHABLE  
FOOTREST



REMOVABLE BATTERY BOX  
FOR EASY RECHARGING



EASY FOLDING



HANDLE HEIGHT ADJUSTMENT

## PARAMETERS



15-20KM  
DRIVING RANGE



DC 250W\*  
2 PCS



24 V 20AH  
(DOUBLE BATTERY)



PARKING  
BRAKE



ALUMINIUM  
ALLOY



MAX SPEED  
6KM/H



ELECTROMAGNETIC  
& MANUAL BRAKE



ATTENDANT  
CONTROLLER

# EVOX WC-105/105E



# EVOX WC-104R
















**REMOVABLE BATTERY BOX FOR EASY RECHARGING**



**OPERATING WITH PORTABLE REMOTE**



**RECLINING BACKREST & FOOTREST POSITION**

-  N.W. (kg)  
50/57
-  Overall Length(mm)  
1215
-  Overall Width(mm)  
620
-  Overall Height(mm)  
940
-  seat width(mm)  
450
-  seat depth(mm)  
435
-  backrest height(mm)  
395
-  seat height(mm)  
500
-  folded width(mm)  
370
-  front wheel(inch)  
8
-  rear wheel(inch)  
12
-  loading capacity(kg)  
120
-  6-9"

## PARAMETERS

-  15-20KM  
DRIVING RANGE
-  DC 250W\*  
2 PCS TAIWAN
-  24 V 20AH  
(DOUBLE BATTERY)
-  PARKING  
BRAKE
-  ALUMINIUM  
ALLOY
-  MAX SPEED  
6KM/H
-  ELECTROMAGNETIC  
& MANUAL BRAKE
-  ATTENDANT  
CONTROLLER



N.W. (kg)

35/36



Overall Length (mm)

1030



Overall Width (mm)

685



Overall Height (mm)

955



seat width (mm)

450



seat depth (mm)

435



backrest height (mm)

395



seat height (mm)

500



folded width (mm)

415



front wheel (inch)

8



rear wheel (inch)

22



loading capacity (kg)

100



6-9'

RUBBER GRIP  
PUSH HANDLES

CONTROLLER CAN BE FIXED  
ON BOTH SIDES

COMFORTABLE  
CUSHION

ADJUSTABLE &  
DETACHABLE  
FOOTREST

FLIPOP  
ARMREST

DUAL OPERATION  
MANUAL MODE



REMOVABLE BATTERY BOX  
FOR EASY RECHARGING



EASY FOLDING



HANDLE HEIGHT ADJUSTMENT

## PARAMETERS



15-20KM  
DRIVING RANGE



DC 250W\*  
2 PCS



24 V 20AH  
(LITHIUM BATTERY)



PARKING  
BRAKE



MANUAL  
MODE



MAX SPEED  
6KM/H



ELECTROMAGNETIC  
BRAKE



ATTENDANT  
CONTROLLER


# EVOX WC-103



# EVOX WC-101/101E

RUBBER GRIP  
PUSH HANDLES

CONTROLLER CAN BE FIXED  
ON BOTH SIDES

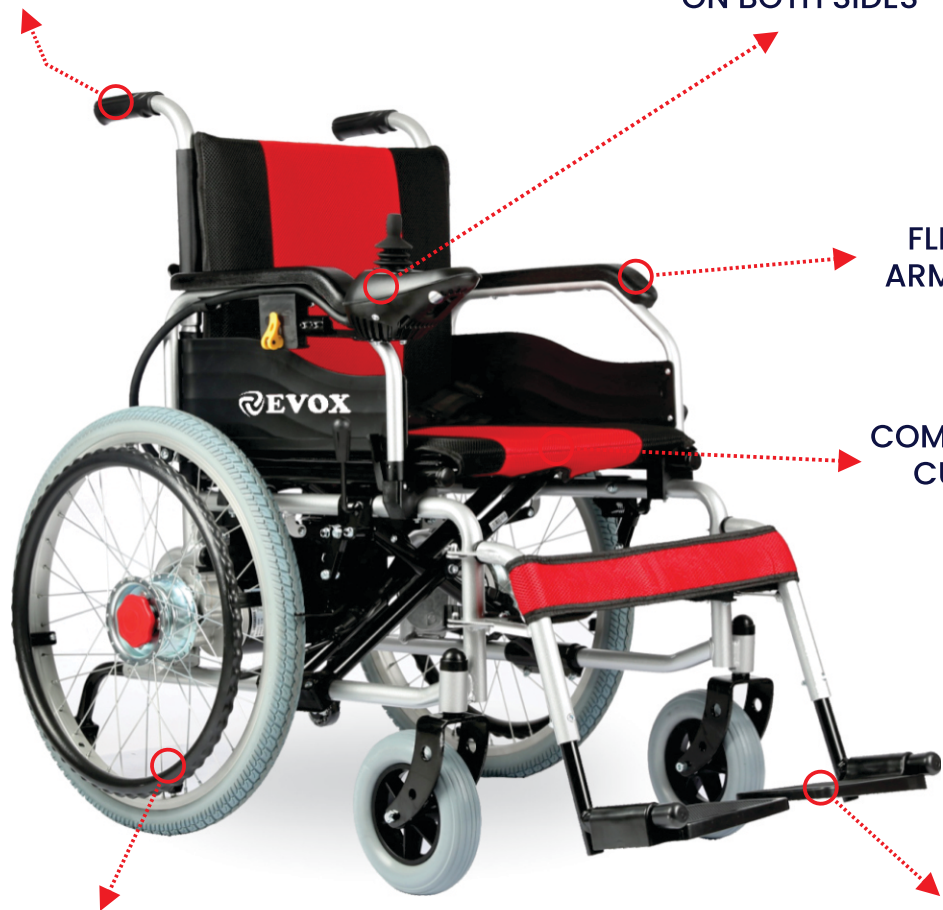

FLIPUP  
ARMREST

COMFORTABLE  
CUSHION

DUAL OPERATION  
MANUAL MODE

ADJUSTABLE &  
DETACHABLE  
FOOTREST



REMOVABLE BATTERY BOX  
FOR EASY RECHARGING



EASY FOLDING



HANDLE HEIGHT ADJUSTMENT

	N.W. (kg)	40/46
	Overall Length(mm)	1090
	Overall Width(mm)	685
	Overall Height(mm)	930
	seat width(mm)	450
	seat depth(mm)	435
	backrest height(mm)	395
	seat height(mm)	500
	folded width(mm)	420
	front wheel(inch)	8
	rear wheel(inch)	22
	loading capacity(kg)	100
		6-9"

## PARAMETERS

-   
 12-15KM  
DRIVING RANGE
-   
 DC 250W\*  
2 PCS
-   
 24 V 12AH  
(DOUBLE BATTERY)
-   
 PARKING  
BRAKE
-   
 MANUAL  
MODE
-   
 MAX SPEED  
6KM/H
-   
 ELECTROMAGNETIC  
BRAKE
-   
 ATTENDANT  
CONTROLLER




- N.W. (kg)  
45/51
- Overall Length(mm)  
1140
- Overall Width(mm)  
630
- Overall Height(mm)  
980
- seat width(mm)  
450
- seat depth(mm)  
460
- backrest height(mm)  
395
- seat height(mm)  
500
- folded width(mm)  
370
- front wheel(inch)  
10
- rear wheel(inch)  
16
- loading capacity(kg)  
100
- 6-9"

**RUBBER GRIP  
PUSH HANDLES**

**CONTROLLER CAN BE FIXED  
ON BOTH SIDES**

**COMFORTABLE  
CUSHION**

**CLUTCH**

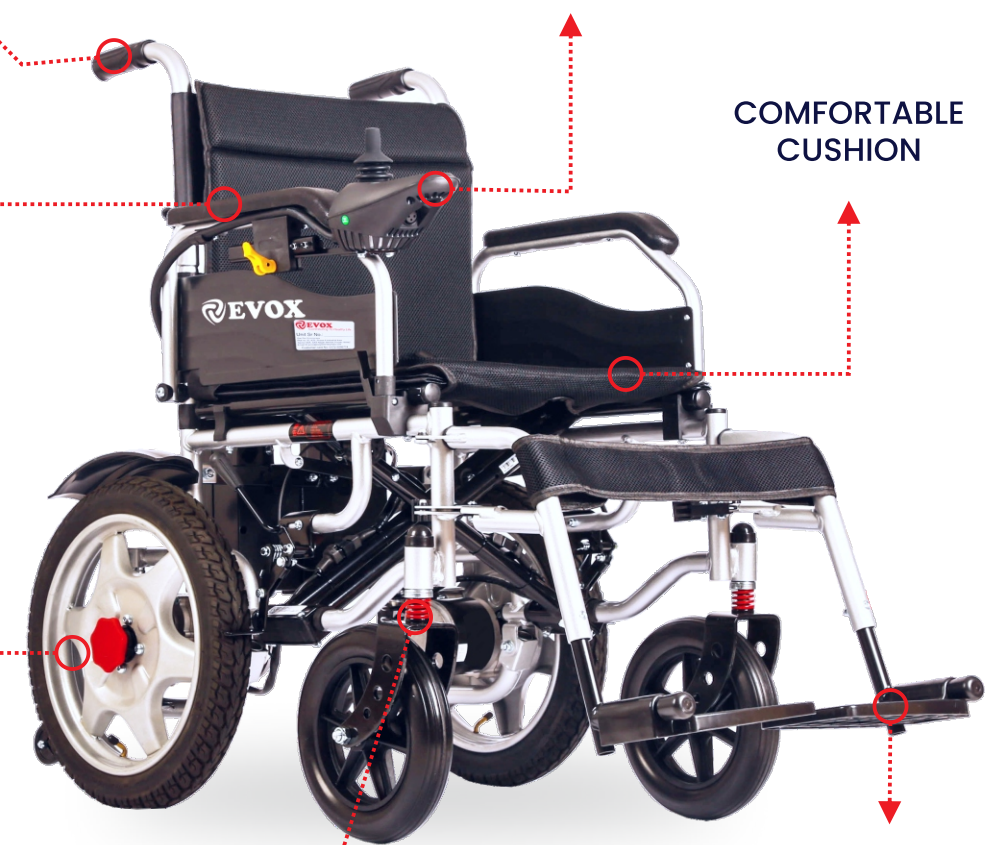

**SHOCKERS**

**ADJUSTABLE &  
DETACHABLE  
FOOTREST**



**REMOVABLE BATTERY BOX  
FOR EASY RECHARGING**



**STEEL WITH LIQUID  
PAINTING MATERIAL**



**MAG WHEELS WITH  
PNEUMATIC TYRES**

## PARAMETERS

- 15-20KM  
DRIVING RANGE
- DC 250W\*  
2 PCS
- 24 V 12AH  
(DOUBLE BATTERY)
- PARKING  
BRAKE
- ALUMINIUM  
ALLOY
- MAX SPEED  
6KM/H
- ELECTROMAGNETIC  
& MANUAL BRAKE
- ATTENDANT  
CONTROLLER

# EVOX 10LPM OXYGEN CONCENTRATOR

The first one to focus on Fluctuation of an oxygen concentrator.  
The first one to control the Fluctuation rate within 0.1%.



FLOWMETER



95% OXYGEN PURITY



HUMIDIFIER BOTTLE

95%

All purity tested over 95% before dispatch.



Large & LED Light Display all functional data.

96%

Oxygen Purity Display by Numbers (Accuracy 96.0%).



Timer Auto Stop.



Accumulated total running hours.

EVOX-10S/10D

## Models and Functions

Model	Max O2 Flow	O2 Purity	O2 outlet	Volts	Watts	O2 Pressure	Noise	Timer	Alarm	O2% Display
EVOX-10S	10L/min	93%±3%	Single	AC 220~240V	630W	≤70KPa	≤55dB(A)	YES	YES	YES
EVOX-10D	10L/min	93%±3%	Double	AC 220~240V	630W	≤70KPa	≤55dB(A)	YES	YES	YES

## Accessories

### Model

### Evox-10S

### Accessories

- 1 Nasal oxygen cannula
- 1 Humidifier bottle
- 1 Humidifier bottle intake tube
- 1 User Manual

## Technical Specifications

### System Map

#### Oxygen Driving System

### Functions

- Oxygen Flow
- Oxygen Concentration
- Oxygen Output Pressure
- Oxygen Number Display

### Evox-10S

- 10 Liter Per Minute
- 93% ± 3%
- 40~70 KPa
- YES

#### Screen Display System

#### Display Material

All by LED lights

#### What Can Be Displayed ?

- "Oxygen" light on
- "Purity Percentage" light on
- "Each Running Time" light on
- "Accumulated Time" light on
- "Timer Setting Minutes"

#### Operating System

#### Operating Panel

E- Touch

#### OXYGEN

Start to produce Oxygen

#### TIMER "+" and "-"

Setting from 0 to 3 hours  
(15mins increase or decrease)

#### 6 Safety System

#### Low Oxygen Alarm

YES

#### Oxygen Pressure Protection Alarm

YES

#### Pressure Faulty Alarm

YES

#### Power off Alarm

YES

#### Compressor Faulty Alarm

YES

#### Overheated Protection

YES

#### Packaging Details

#### Machine Body Size

414\*337\*666 mm

#### Net Weight per Unit

25.7 kg

#### Operating Condition

#### Operating Temperature

41°F to 113°F (5°C to 45°C)

#### Operating Humidity

30% to 80% RH

#### Operating Atmospheric Pressure

613-1060hp

#### Storage Temperature

14°F to 122°F(-10°C to 50°C)

#### Storage Humidity

20 to 90% RH



# EVOX 5LPM OXYGEN CONCENTRATOR

The first one to focus on fluctuation of an oxygen concentrator and can control the fluctuation rate within 0.1%.



## Purity For Surety



TOUCH OPERATE

5

5 LITERS



OXYGEN PURITY



TIMER



ACCUMULATED  
HOURS



6" LED DISPLAY

### ACCESSORIES

1 HUMIDIFIER BOTTLE

1 NEBULIZER KIT

1 CANNULA

1 OUTLET TUBE

1 DUST FILTER



## ◆ Models and Functions

Model No	Max O <sub>2</sub> Flow	O <sub>2</sub> Purity	Volts	Watts	O <sub>2</sub> Pressure	Nebulizer	Timer	Alarm	O <sub>2</sub> 00.0% Display
EVOX-5S	5L/min	93%±3%	AC 220V	350W	≤70KPa	S	YES	YES	YES

## ◆ Technical Specifications

System Map	Functions	EVOX-5S
<b>Driving System</b>	Oxygen Flow Oxygen Concentration Oxygen Output Pressure Oxygen Number Display	0.5□5L/min 93% +3% 40-70KPa YES
<b>Nebulizer System</b>	Nebulizer Mode Individual Nebulizer Outlet Display Method Operating Way Nebulizing Particle Size Accessories	YES YES On LED screen By touch panel button 3.6μm±25% Nebulize Kit and mask
<b>Screen Display System</b>	Display Material  What Can Be Displayed ?	All by LED lights "Oxygen" light on "Nebulize" light on "Oxygen Percentage" light on "Each Running Time" light on "Accumulated Time" light on "Timer Setting Number"
<b>Operating System</b>	Operating Panel Oxygen Nebulize Timer "+" and "-"	Smart Touch Start to produce Oxygen Start to run Nebulizer Setting from 0 to 3 hours (15/30 mins increase or decrease)
<b>Safety System</b>	Low Oxygen Alarm Oxygen Pressure Protection Alarm Pressure Faulty Alarm Power off Alarm Compressor Faulty Alarm Overheated Protection	YES YES YES YES YES YES
<b>Electrical System</b>	Power Consumption Auto Power off by timer Screen Sleep Mode Noise Level	350 W YES YES <46db(A)
<b>Packing</b>	Machine Body Size Package Size Net Weight Gross Weight Body Material	380x270x580mm 460x350x680mm 15.6kg 19 kg ABS, Glaze

# BIPAP NoahSleep™ series

## BIPAP Non-Invasive Ventilator

CHOOSE A BETTER PRODUCT FOR  
A HIGHER QUALITY SLEEP



5 years data



4.3 inch



1.26 kg



### 4.3 Inches high resolution colorful screen.

Exquisite UI design, multi-theme of  
the monitored parameters on one screen.

### Touchscreen and high flexible navigator knob.

Easy to operate.

### Light-Weighted

1.26kg. Convenient for home and traveling.

### Silent

The noise level achieves less than 30dB  
contributed by the research from experienced team.

### Portable

Detachable design of the main unit and  
humidifier meets different demands of the user.


## ACCESSORIES

- CPAP:** Continuous Positive Airway Pressure mode, suitable for obstructive Sleep Apnea.
- AUTOS:** Intelligent regulation of inspiratory pressure to ensure a more smooth and comfortable breath.
  - S:** Spontaneous ventilation mode, suitable for patient with spontaneous respiratory
  - T:** Timed mode, suitable for patients without spontaneous respiratory capacity.
- S/T:** The machine automatically switches between S & T modes according to patient's respiratory condition.
- VGPS:** Volume Guarantee Pressure Support, meets patient's tidal volume requirement with its minimum pressure.




## PRODUCT SPECIFICATION

Product Model	NoahSleep25A	NoahSleep25ST	NoahSleep30ST
Ventilation Modes	CPAP, S, Auto S	CPAP, S, T, ST, VGPS	CPAP, S, T, ST, VGPS
IPAP	6-25hPa	6-25hPa	6-30hPa
EPAP	4-23hPa	4-23hPa	4-25hPa
MIN IPAP	6.0-25.0hPa	6.0-25.0hPa	6-30hPa
MAX IPAP	6.0-25.0hPa	6.0-25.0hPa	6-30hPa
Target Tidal Volume	/	200ml-1500ml	200ml-1500ml
Res. Rate	10BPM	10BPM / 5-40BPM	10BPM / 5-40BPM
Ti (sec.)	2s <small>(Backup frequency)</small>	2s <small>(Backup frequency) / 0.3-4s</small>	2s <small>(Backup frequency) / 0.3-4s</small>
Ti min (sec.)	0.5-4s	0.5-4s	0.5-4s
Ti max (sec.)	1-4s	1-4s	1-4s
Trigger and Cycle	1-6	1-6	1-6
Rise Slope	1-6	1-6	1-6
Monitoring Parameters	Pressure, Tidal volume, Minute ventilation, Respiratory rate, Leakage		
Oximetry Accessory	Optional		
Therapy Data Storage	Yes, SD card		
NoahSleep -Dry Drying Technology	Yes		
Auto On/Off	Yes		
Noise Level	<30 dB		
Screen Size	4.3 Inches Color Touchscreen		
Weight	Main unit: 0.82kg With humidifier: 1.26kg		
Adaptor	AC input: 100-240V, DC output: 24V		

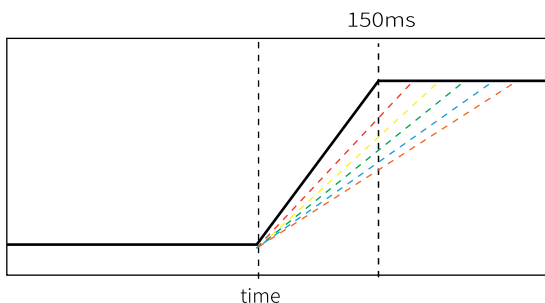

Pressure rise slope: 6 levels adjustable

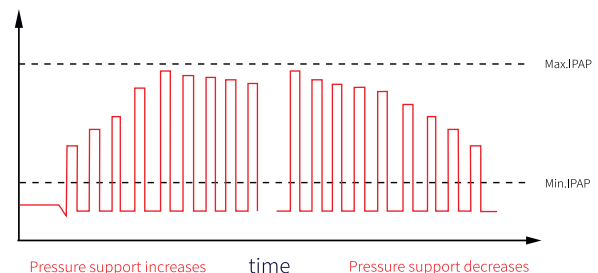


**VGPS (Volume Guarantee Pressure Support) mode, ensures the ventilation volume target.**

# CPAP NoahSleep™ series

CHOOSE A BETTER PRODUCT FOR  
A HIGHER QUALITY SLEEP



5 years data



3.5 inch



1.26kg



Super smooth shifts between  
inspiration and expiration



Noah Sleep-Dry technology



Intelligent identifying CSA avoids  
improper pressure rise.

Real-time manual titration

CPAP and Auto CPAP for your choice

Elex expiration pressure release



NoahSleep series


# Product Parameters

<b>Basic Information</b>	<b>Type</b>	<b>Auto CPAP</b>		
	<b>Device model</b>	Noah Sleep 5A		
	<b>Working models</b>	CPAP, Auto CPAP		
<b>Functions</b>	<b>Identification of CSA</b>	Yes		
	<b>Expiration pressure release</b>	NoahSleep Elex 1-3 level		
	<b>Auto On/Off</b>	Yes		
	<b>Leaking compensation</b>	Yes		
	<b>Manual Titration</b>	Yes		
	<b>Therapy data review through screen</b>	P90, AHI, SNI, LEAK90, CAI, AI, Average pressure		
	<b>Therapy data recording</b>	Therapy data recording up to 5 years, reading through screen and PC software		
	<b>PM2.5 /Pollen Filter</b>	Folded PM2.5/Pollen filter(Unfolded area up to 20 cm <sup>2</sup> )		
	<b>Mask leaking test</b>	Yes		
<b>NoahSleep Dry Technology</b>	30-min lower speed running of the blower keeps the device and tube dry			
<b>Alerts</b>	Power down alert, leak alert, alarm clock, filter change alert, and customized alerts			
<b>Main device parameters</b>	<b>Pressure</b>	4-20cmH <sub>2</sub> O	<b>Ramp</b>	0-60min
	<b>Dimensions</b>	160 mm × 148 mm × 99.5 mm (Main device) 247 mm × 148mm × 99.5 mm (Humidifier included)		
	<b>weight</b>	Main device: 0.88kg; incl. humidifier: 1.26kg		
	<b>Noise</b>	≤28dB	<b>Screen</b>	3.5 inch touch screen
	<b>Adapter</b>	100-240V AC, 24V DC	<b>Language</b>	English.
<b>Humidification system</b>	<b>Function</b>	Heated humidification, 5 levels to adjust, infrared communication with main device		
	<b>Humidifier volume</b>	300ml		



# TWINPAP series

COMBINATION OF AUTOCPAP & AUTOBIPAP

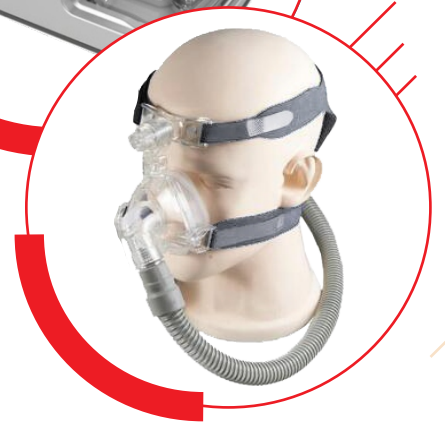

## CPAP/BIPAP

For Sleep Apnea Hypopnea Syndrome (SAHS)

**NIV FULL-FACE MASK**



## Technical Data



CPAP

TWINPAP

**C-09**

**B-19**

### Modes

**M**

CPAP

CPAP

**O**

Auto CPAP

Auto CPAP

**D**

S

**E**

T

**S**

S/T

Auto BIPAP

### Parameters

Pressure Range

4-20 cmH<sub>2</sub>O

4-25cmH<sub>2</sub>O

Belex

2-4cmH<sub>2</sub>O

2-4cmH<sub>2</sub>O

Ramp

0-60 min

0-60 min

Esens (1-6 levels)

✓

Isens (1-6levels)

✓

Auto-leak Compensation

✓

✓

Auto-altitude Adjustment

✓

✓

Auto-On/Off

✓

✓

Pressure Titration

✓

✓

Noise Level (10cmH<sub>2</sub>O)

<30dBA

<35dBA

### Heating Humidifier

Adjustable Humidify

✓

✓

Replaceable Water Chamber

✓

✓

### Data Download

Data Details

✓

✓

Data Summary

✓

✓

Download to PC

✓

✓



# NoahSleep<sup>TM</sup> series



**EVOX**  
*Contributing to healthy life...*

📍 Plot No. EL-635, Phase-9 Industrial Area Sector-66A,  
SAS Nagar (Mohali) Punjab-160062

☎️ 📞 7696052635, 0172-5099774

✉️ [info@evoxcare.in](mailto:info@evoxcare.in)

🌐 [www.evoxworld.com](http://www.evoxworld.com)

